

MODULAR FIXTURES

Stainless steel channel

To determine your modular fixture:

A) Specify the reference of the profile

B) Fill in the following sizes C, D, E, L and diameter opposite

C) Specify the:

• Number of screws and length

or

• Number of self-locking nuts slotted or self-locking star nuts or non self-locking

--	--

• Diameter of these fixtures : M

--	--


• Number of identical modular fixtures

--	--	--


• Quality of class for screws or nuts

--	--

--	--

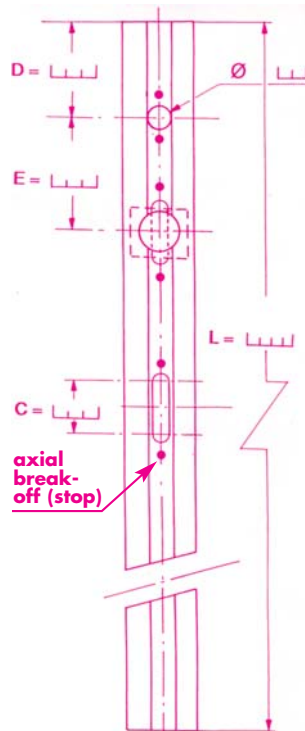


Ref. 201144




Material : Z6 CN 1809 (AISI 304)

Ref. 203010




Material : Z8 C 17 (AISI 430)

Ref. 203326



Material : Z2 CN 1810 (AISI 304L)

Ref. 203048























Material : Z2 CN 1810 (AISI 304L)

Ease of use:

- From 25 mm to 6 meters long;
- Unlimited quantity of nuts and/or screws can be positioned within the channel;
- Range of diameter for nuts and / or screws;
- Range of type of nuts and/or screws (combination possible);
- Equal spacing between products;
- Internal technical setup (oval holes, lights, spring mounts, prepunched rivet holes);
- Channels may be manufactured straight, bent and/or curved.

For special applications and inserts, please do not hesitate to contact us.

Equiped channel	Nut \varnothing	Nut \varnothing starnuts locking	Nut \varnothing 2 slots-locking	Square head screw
	d : M3 to M5 	d : M3 to M5  deflections	d : M3 to M5 	d : M3 to M6 
	d : M3 to M8 	d : M3 to M8  deflections	d : M3 to M8 	d : M3 to M8 
	d : M6 to M12 	d : M6 to M12  deflections	d : M6 to M10 	d : M8 to M12 
	d : M6 à M10 	d : M6 à M10  deflections	d : M6 à M8 	d : M6 à M12 

FASTENERS

Threading: to standard NF ISO 262 (NFE 03014) and NF ISO 965-2 (NFE 03053)

Characteristic and performance tests: NF EN ISO 2320 (NFE 25408), NFE 25035 and NF EN ISO 3506-2

Material: - Stainless steel A2-70.

- Steel grade 5 / class 8.8

Surface treatment: STAINLESS STEEL - Antigalling NFE 25035 on request (Stanal 400)

- Sherardisation

- Passivation

STEEL

- All treatments

Field of application: Contact us